



PCT/EP200 4 / 0 5 0 6 5 7

13.09.04



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 850D

23 SEP 2004

WIPO

PCT


**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

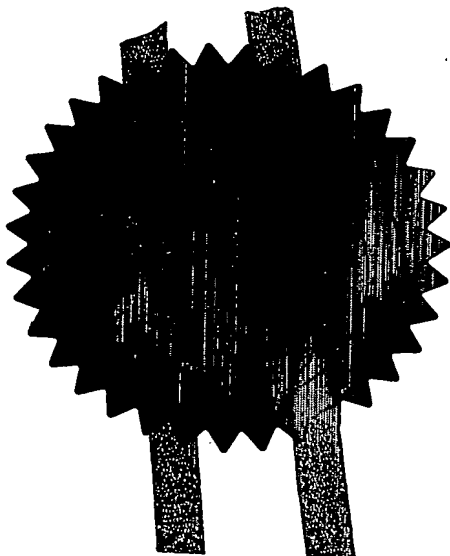

Signed

*Stephen Hordley*

Dated

15 April 2004

## Patents Form 1/77

Patents Act 1977  
(Rule 16)The  
Patent  
Office17 JUN 2003  
PC/EP/2004/050657  
13.09.04

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form.)

THE PATENT OFFICE  
JR

17 JUN 2003

The Patent Office

Cardiff Road

Newport

Gwent NP9 1RH

1. Your reference

CM060261/PCS/GBR/LCC/ROZENTAL

2. Patent application number

(The Patent Office will fill in this part)

0313928.4

17 JUN 2003

7JUN03 E815428-1 002319

01/7700 0.00-0313928.4

3. Full name, address and postcode of the or of each applicant (underline all surnames)

MOTOROLA, INC  
1303 EAST ALGONQUIN ROAD,  
SCHAUMBURG, ILLINOIS 60196,  
U.S.A.

Patents ADP number (if you know it)

08281107001

If the applicant is a corporate body, give the country/state of its incorporation

U.S.A.

DELAWARE

4. Title of the invention

CARTESIAN LOOP TRANSMITTER AND METHOD OF ADJUSTING AN  
OUTPUT LEVEL OF SUCH TRANSMITTER

5. Name of your agent (if you have one)

DEREK J MCCORMACK

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

EUROPEAN INTELLECTUAL PROPERTY DEPARTMENT  
MIDPOINT  
ALENCON LINK  
BASINGSTOKE  
HAMPSHIRE RG21 7PL  
UK  
ADP NO. 00001180006

Patents ADP number (if you know it)

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

☒ YES ☐ NOa) any applicant named in part 3 is not an inventor, or  
b) there is an inventor who is not named as an applicant, orc) any named applicant is a corporate body.  
See note (d)).

Patents Form 1/77

0071945 17 Jun 03 12:14

## Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 10

Claim(s) 3

Abstract 1

Drawing(s) 3

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 4

Request for preliminary examination and search (Patents Form 3/77) 1

Request for substantive examination (Patents Form 10/77) 1

Any other documents 1 x FEE SHEET  
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

D. McCormack

Date

17/6/03

12. Name and daytime telephone number of person to contact in the United Kingdom

DEREK J MCCORMACK

Louise CRISTOFOLI

01256 790589

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DUPLICATE

Cartesian Loop Transmitter And Method Of Adjusting An  
Output Level Of Such Transmitter

5

Field of the Invention

The present invention relates to radio linear transmitters. More specifically, it relates a linear transmitter, whose stability of operation is maintained without an isolator and a method of adjusting an output level of such transmitter.

Background of the Invention

Radio communication devices use antennas to provide for the efficient transmission of radio frequency (RF) communication signals. The transmitter portion of a communication device includes a power amplifier to amplify the radio frequency signals before they are coupled to the antenna for transmission. As modern radio communication systems work in narrow frequency bands the transmitters' circuitries require RF power amplifiers able to operate in a linear fashion. Linear amplification is required to prevent distortion of the modulated signal and minimizing the interference. However non-linearity of real world RF amplifiers appears when they are operated at high drive levels. Similar situations may be caused by operating conditions. For example, a transmitter operating near an electromagnetically reflective structure may be susceptible to energy reflected back through the antenna into the transmitter.

There are known in the art transmitters with improved linearity. One method of linearization of transmitters is to use a Cartesian feedback loop based

linearizer. The Cartesian feedback linearizer allows maintaining linearity of the transmitter while still allowing RF power amplifier to work close to its saturation point thus maintaining good efficiency. To protect against changes in load impedance as a result of reflected energy, an isolator or circulator is often inserted between the antenna and the power amplifier. The isolator protects the power amplifier by absorbing the reflected energy and preventing it from reaching the amplifier. The isolator directs the reflected energy to an absorptive load termination. Although the isolator generally works well, it adds significant cost, size, and weight to the design of a radio communication device. Isolators are narrowband, expensive and have large physical dimensions (especially at low frequencies).

There are also known in the art Cartesian loop transmitters without isolators. One such example is described in US patent application no. US2003/0031271. In this document a method for isolator elimination is disclosed. In this prior art solution an isolator eliminator provides phase and level correction signals on the basis of samples of an information signal and a drive signal sampled from a feedback loop. These correction signals maintain stability the operation of the transmitter.

#### Summary of the Invention

There is a need for an apparatus and a method for adjusting an output level of a Cartesian loop transmitter which alleviate or overcome the disadvantages of the prior art.

3.

According to a first aspect of the present invention there is thus provided a Cartesian loop transmitter comprising a forward path and a feedback path (each of these paths comprising an I-channel and a Q-channel) as well as an isolator eliminator, said transmitter comprising:

- a first low pass filter and a first band pass filter connected to I-channel after loop poles and zeros and before upconverters (this point on the circuit will be further referenced as LP2);
- a second low pass filter and a second band pass filter connected to Q-channel at LP2;
- a first root mean square detector collecting signal from said first low pass filter and from said second low pass filter;
- a second root mean square detector collecting signal from said first band pass filter and from said second band pass filter;
- a divider connected to said first and said second root mean square detectors;
- a comparator connected to said divider; and to
- a microprocessor connected to an input attenuators and on said I- and Q-channels.

According to a second aspect of the present invention there is thus provided a method of adjusting an output level of a Cartesian loop transmitter in a digital radio system. The method comprising the steps of applying a factory predefined attenuation setting for adjusting said output level if attenuation setting for a previous slot is not available, or applying said attenuation setting obtained in previous slot for adjusting said output level in a current slot. Further steps are measuring an on-channel baseband signal level as well as a noise level at predefined frequency offset

at LP2 and then calculating a ratio of said noise level to said on channel baseband signal level. If said ratio is above a threshold said attenuation setting of an input signal is increased. Finally, storing said  
5 attenuation setting in a memory.

Characteristics of a Radio Frequency Power Amplifier (e.g. Adjacent Channel Power (ACP), output power, etc.) change under influence Voltage Standing  
10 Wave Ratio (VSWR). The present invention beneficially allows adjusting a Cartesian loop output power by monitoring said Radio Frequency Power Amplifier (RFPA) nonlinearity.

15 Advantages of the present invention include:

- 1) The method does not rely on specific RFPA behaviour versus (VSWR). An algorithm is monitoring non-linear products behaviour.
- 2) The method does not require RFPA characteristic  
20 factory tuning.
- 3) The method and the apparatus according to the present invention ensure extremely fast reaction to RFPA linearity change (less than 500  $\mu$ sec).

25 Brief description of the drawings

The present invention will be understood and appreciated more fully from the following detailed description taken in conjunction with the drawings in  
which:

30

Fig. 1 is a schematic diagram illustrating a Cartesian loop transmitter in accordance with an embodiment of the present invention;

5

Fig. 2 is a flow chart illustrating a method of adjusting an output level of a Cartesian loop transmitter in accordance with an embodiment of the present invention;

5

Fig. 3 is a simplified diagram of a known in the art Cartesian feedback loop transmitter.

Detailed description of an embodiment of the invention

10 The term LP2 herein below refers to a point in the transmitter circuit located between loop poles and zeros and upmixer.

Referring to Fig. 1 a Cartesian loop transmitter  
15 circuit 100 according to one embodiment of the present invention is presented. Said Cartesian loop transmitter 100 incorporates a forward path 102, a feedback path 104 and an isolator eliminator 106. Said Cartesian loop transmitter 100 receives inputs at a baseband frequency  
20 in I- and Q-channels' attenuators, 108 and 110 respectively. Baseband signals from said attenuators 108 and 110 pass Cartesian loop summing junctions 112 and 114 to amplifiers and loop filters 116 and 118. Said baseband signals are then upconverted to radio frequency  
25 (RF) signals by upconverters 120 and 122. Said RF signals are then combined at a RF summer 124 and amplified by a Radio Frequency Power Amplifier (RFP A) 126 and then transmitted over the air from an antenna 128.

30

Said feedback path 104 is supplied with a feedback signal from a directional coupler 130 which takes part of said RF signal from said forward path 102. Said feedback signal from said directional coupler 130 is



downconverted to said baseband frequency by  
downconverters 132 and 134.

A local oscillator (LO) 136 generates a continuous  
5 wave RF carrier at the RF transmit frequency. A signal  
from said LO 136 is then applied to an I-channel up-  
converter 120 and an I-channel down-converter 132. Said  
LO 136 signal is also applied to a Q-channel up-  
converter 122 through a first 90 degree phase shifter  
10 158 and to a Q-channel down-converter 134 through a  
second 90 degree phase shifter 160.

After applying mixing to baseband in said down-  
converters 132, 134 said feedback signal is passed to  
15 said first summing junctions 112 and 114 respectively.

Said isolator eliminator 106 monitors transmitted  
signals at LP2, i.e. after amplifiers and loop filters  
116 and 118 and before upconverters 120 and 122. Said  
20 loop filters of 116 and 118 are baseband low pass  
filters that consist of poles and zeros.

With reference to Fig. 1 and 2 said isolator  
eliminator 106 continuously collects an on-channel  
25 baseband signal level as well as a noise level at a  
predefined frequency offset in relation to a  
transmission channel, 206 and 208, from both said I- and  
Q-channels.

30 In one embodiment the frequency offset can be  
+ 13.5 kHz (or -13.5 kHz). This is done by passing the I-  
channel LP2 signal through a centered, narrow, 2kHz,

7.

first band pass filter 140 at + 13.5 kHz (or -13.5 kHz) offset, whereas Q-channel LP2 signal is passed through a second band pass filter 144.

5 Said baseband signals from said I- and Q-channels are filtered by a first and a second 8 kHz low pass filters 138 and 142 respectively

10 Then outputs from said band pass filters 140 and 144 and said low pass filters 138 and 142 are passed through root mean square (RMS) detectors 146 and 148 to a divider 150. In said divider 150 a ratio of said RMS of said noise level to said RMS of said on-channel baseband signal level is calculated 214. Result of said  
15 calculation is passed to a comparator 152. Said comparator 152 sends signal HIGH if said ratio exceeds a predefined threshold THR or LOW if said ratio is equal or below said predefined threshold THR.

20 Said signal from said comparator 152 is received by a microprocessor 154, which controls said input attenuators 108 and 110 of said I- and Q-channels. If said signal from said comparator 152 is HIGH said microprocessor 154 sends command to said input  
25 attenuatots 108 and 110 to increase attenuation 218 setting by a predefined constant value.

Said microprocessor 154 applies then a delay 220 to execution of software, which based on next samples,  
30 calculates said ratio and increases said attenuation setting. Said delay is implemented by not reading results of said comparator 152 for defined period of time. Said delay is applied to ensure that after

8

increasing said attenuation setting the output of other elements of the circuit, i.e. said filters 138, 140, 142 and 144 will be stable (filter step response transient effect will be over).

5

Said microprocessor 154 stores 222 said attenuation setting of said input attenuators 108 and 110 in a memory 156.

10 Fig. 2 shows a flow chart illustrating a method of adjusting an output level of a Cartesian loop transmitter 100 in a digital radio system according to one embodiment of the present invention.

15 In the first step 200 it is checked whether said attenuation setting from previous slot are stored in said memory 156. If said data are available said Cartesian loop transmitter 100 is adjusted according to these setting 204. If this is a first slot in  
20 transmission and there are no said attenuation setting stored in said memory 156 a factory default setting are used 202 for adjusting said transmitter 100. When the transmitter 100 starts transmission said on-channel baseband signal level 206 and said noise level at  
25 predefined frequency offset 208 are measured at LP2. Root mean square values of said noise level 212 and said on-channel baseband signal level 210 are taken for calculation of a ratio of said noise level to said on-channel baseband signal level 214. Said noise is also  
30 measured at LP2 and is mainly due to the RFFA non-linear intermodulation products.

If said ratio is equal or below 216 a predefined threshold then measurements of said on-channel baseband signal level 206 and said noise level 208 are performed.

- 5 If said ratio exceeds said threshold 216, said attenuation setting of said input attenuators 108 and 110 are increased 218 by a constant value. Additionally a delay is applied 220 to execution of software, which based on next samples, calculates said ratio and  
10 increases said attenuation setting.

As during one time slot a plurality of samples are taken, the steps starting from measurement of said noise level and said on-channel baseband signal level 206 and  
15 208 through step of storing 222 said attenuation setting are performed in a loop.

Additionally in the step 222 of storing said attenuation parameters said baseband signal level and  
20 said noise level measured at LP2 are also stored in said memory 156.

Below is a short explanation of theoretical background of the method of adjusting the output level  
25 of Cartesian loop transmitter according to an embodiment of the present invention.

Referring to Fig. 3 which is a simplified diagram of a known Cartesian loop transmitter 300 it can be  
30 found that the transfer function from  $\Delta V_0$  to LP2 ( $\Delta V_0$  represents RFPA 304 non-linear intermodulation products) can be written as follow:

10

$$\frac{V_{LP2}}{\Delta V_0} = \frac{-\beta \cdot H(f)}{1 + H(f) \cdot g_{pa}(VSWR) \cdot \beta} \quad (\text{Eq. 1})$$

For  $H(f) \cdot g_{pa}(VSWR) \cdot \beta \gg 1$  it can be approximated

$$\frac{V_{LP2}}{\Delta V_0} \approx \frac{-1}{g_{pa}(VSWR)} \quad (\text{Eq. 2})$$

Where

$\Delta V_0$  represents RFPA 304 non-linear intermodulation products,

10  $g_{pa}(VSWR)$  is RFPA 304 gain,

$H(f)$  is a loop filter 302 transfer function,

$V_{in}$  is an input voltage to the loop,

$V_{LP2}$  is a voltage after the loop filter 302,

$\beta$  is a feedback loop 306 gain.

15

From Eq. 2 it can be found that those non-linearities at LP2 will be dominated by RFPA 304 non-linearities. This means that Adjacent Channel Power (ACP) of RFPA 304 can be monitored by looking at LP2

20 ACP.

In one embodiment, the isolator eliminator 106 is implemented in software executable on a Digital Signal Processor (DSP). A software implementation is relatively

25 low cost and allows easy reconfiguration. However hardware implementation is also possible. Nevertheless, it will be appreciated that the present invention may be implemented hardware or software and may be used in radio communication devices.

30

Claims

1. A Cartesian loop transmitter (100) comprising a  
5 forward path (102) and a feedback path (104), each  
of these paths comprising an I-channel and a Q-  
channel, as well as an isolator eliminator (106)  
characterized in that said transmitter (100)  
comprising:
- 10 a) a first low pass filter (138) and a first band  
pass filter (140) connected to I-channel at LP2;  
b) a second low pass filter (142) and a second band  
pass filter (144) connected to Q-channel at LP2;  
15 c) a first root mean square detector (146) collecting  
signal from said first low pass filter (138) and  
from said second low pass filter (142);  
d) a second root mean square detector (148)  
collecting signal from said first band pass filter  
(140) and from said second band pass filter (144);  
20 e) a divider (150) connected to said first and said  
second root mean square detectors (146 and 148);  
f) a comparator (152) connected to said divider  
(150); and to  
25 g) a microprocessor (154) connected to an input  
attenuators (108) and (110) on said I- and Q-  
channels.
2. The Cartesian loop transmitter (100) of claim 1  
wherein a memory (156) is connected to said  
30 microprocessor (154).
3. A method of adjusting an output level of a Cartesian  
loop transmitter (100) in a digital radio system,  
the method comprising the steps of:

12

- a) applying a factory predefined attenuation setting (202) for adjusting said output level if attenuation setting for a previous slot is not available (200) , or
- 5 b) applying said attenuation setting obtained in previous (204) slot for adjusting said output level in a current slot;
- c) measuring an on-channel baseband signal level (206) at LP2;
- 10 d) measuring a noise level (208) at predefined frequency offset at LP2;
- e) calculating a ratio (214) of said noise level to said on-channel baseband signal level; and
- f) if said ratio is above a threshold (216):
- 15 increasing an attenuation setting (218) of an input signal;
- g) storing (222) said attenuation setting in a memory.
- 20 4. The method according to claim 3 wherein steps c) through g) are repeated in a loop until said ratio is below said threshold.
- 25 5. The method according to claim 3 or 4 wherein for determining said ratio a root mean square of said on-channel baseband signal level (210) and a root mean square of said noise level (212) are taken.
- 30 6. The method according to any one of claims 3 to 5 wherein after increasing said attenuation setting a delay is applied (220) to execution of software, which based on next samples, calculates said ratio and increases said attenuation setting.

Ref.: CM06026EI/GBRI/PGS/Rozental

13

7. The method according to any one of claims 3 to 6 wherein in said step of storing said baseband signal level and said noise level measured at LP2 are stored in said memory.

5

8. A radio transmitter according to any one of claims 1 to 2 and which is operable to provide communications in at least TETRA and/or GSM and/or IDEN communication systems.

10

9. A radio communication device incorporating a circuit according to any one of claims 1 to 2.

10. A radio communication device operating in accordance with a method according to any one of claims 3 to 7.

15



AbstractCartesian Loop Transmitter And Method Of Adjusting An  
Output Level Of Such Transmitter

5  
10 In accordance with the present invention there is those provided a Cartesian loop transmitter (100) having an isolator eliminator circuitry (106) comprising a set of low pass (138, 142) and band pass (140, 144) filters for each of an I- and Q-channels, root mean square detectors (146, 148) and a divider (150) connected to a comparator (152). Signals from said comparator (152) are received by a microprocessor (154) which controls  
15 attenuation setting. There is also provided a method of adjusting an output level of such transmitter (100). Said method comprises the step of measuring an on-channel signal level (206) and a noise level (208) and then calculating a ratio of said noise to said on-  
20 channel signal (214). If the ratio exceeds a defined threshold (216) an attenuation of the input attenuators is increased (218).

25 Figure 1 to accompany the Abstract

Ref.: CM06026EI/GBRI/PGS/Rozental

1/3

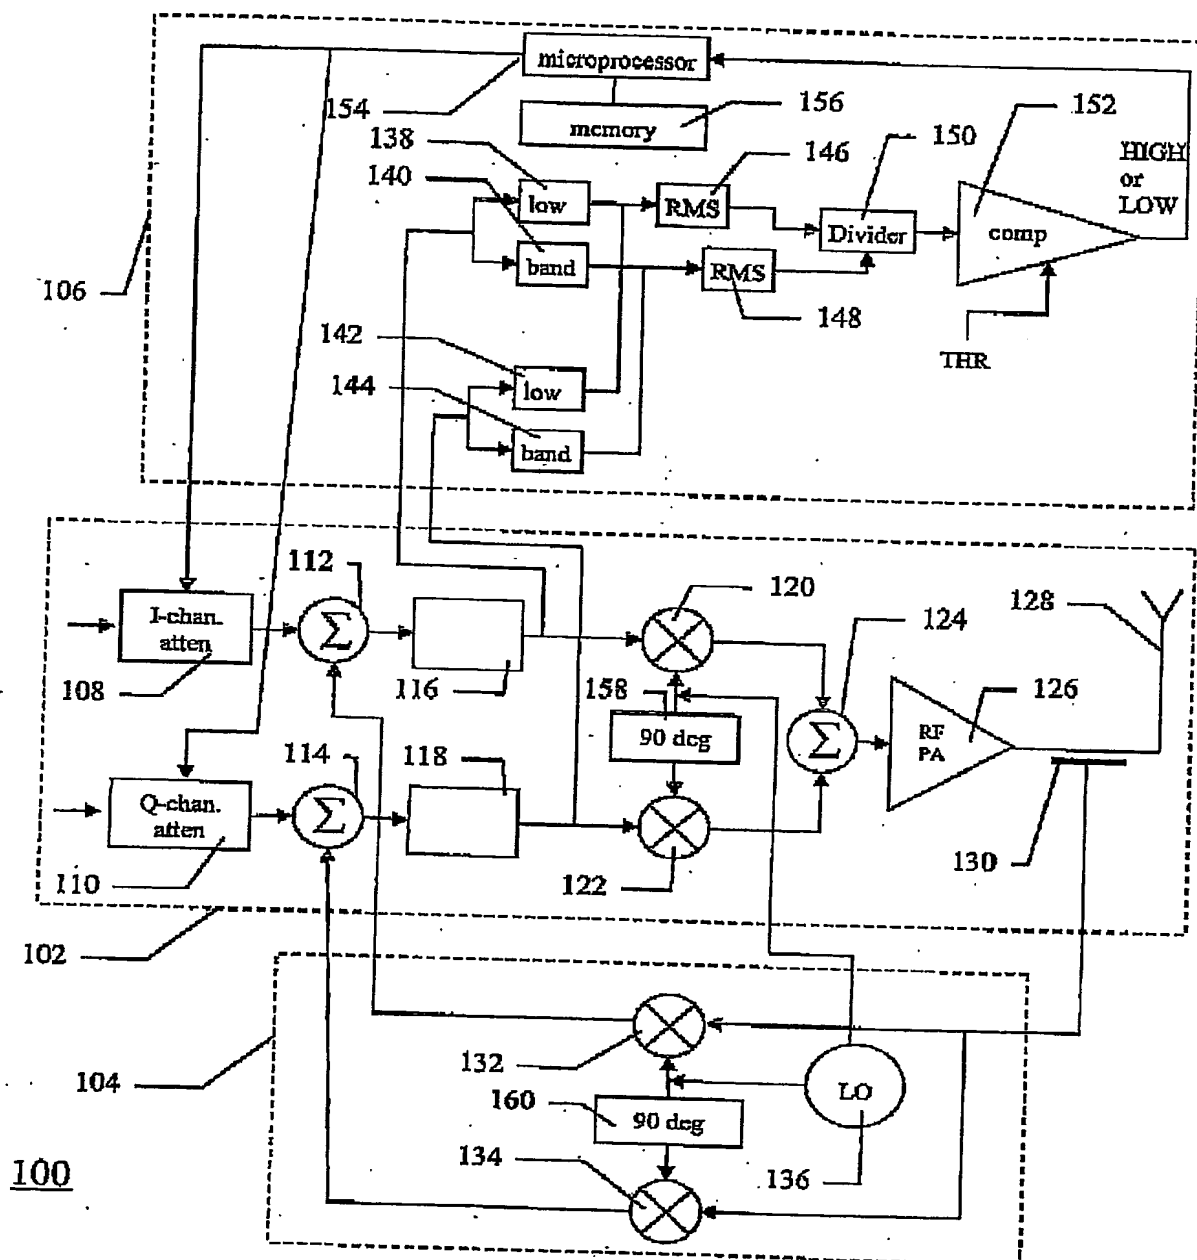


Fig. 1

Ref.: CM06026EI/GBRI/PGS/Rozental

2/3

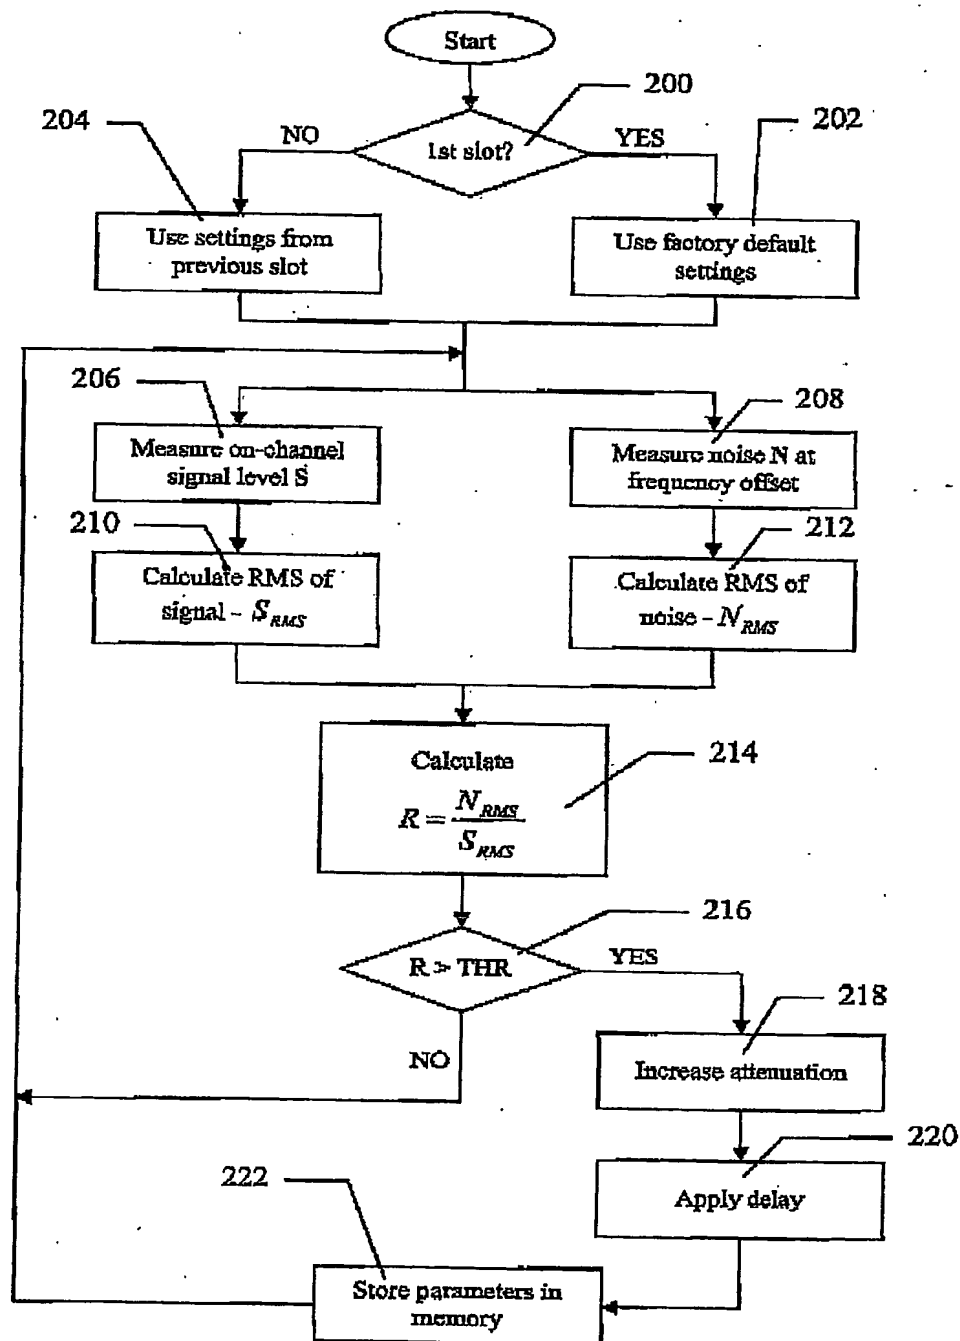


Fig. 2

Ref.: CM06026EI/GBRI/PGS/Rozental

3/3

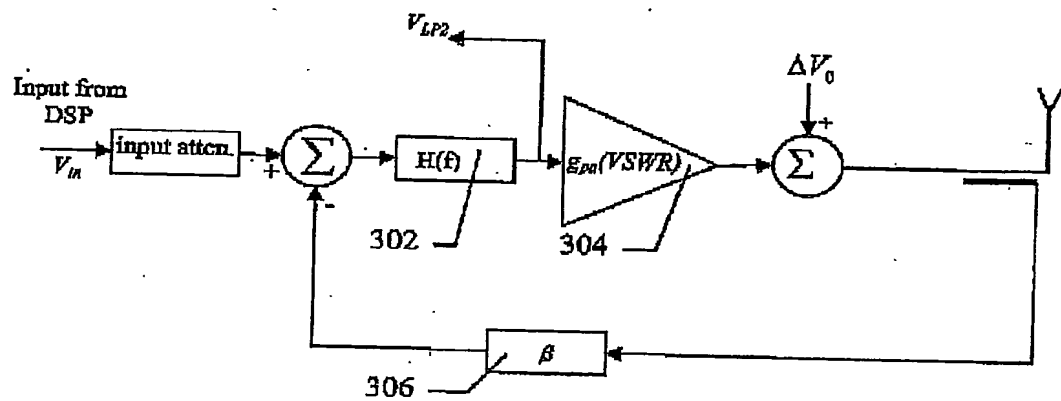


Fig. 3  
(Prior art)

**PCT/EP2004/050657**

